


Molded Grating

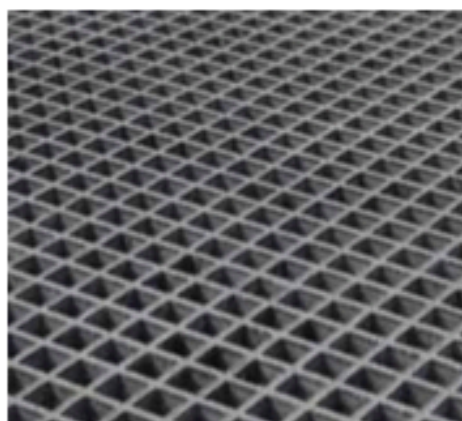

Molded grating is measured by size of grid pattern and panel thickness. Typical panel sizes are: 4' x 8', 4' x 12' and 3' x 10'

IFR Series Isophthalic Polyester Fire Retardant

Panel thickness	Grid Pattern	Panel Size	Color
1.5"	1.5" x 1.5"	4' x 12'	Green
1.5"	1.5" x 1.5"	4' x 12'	Yellow
1.5"	1.5" x 1.5"	3' x 10'	Green
1.5"	1.5" x 1.5"	3' x 10'	Gray
1.5"	1.5" x 1.5"	4' x 8'	Green
1"	1.5" x 1.5"	4' x 12'	Green
1"	1" x 4"	3' x 10'	Green
2"	2" x 2"	4' x 12'	Green

VFR Series Vinyl Ester Fire Retardant

1.5"	1.5" x 1.5"	4' x 12'	Gray
1.5"	1.5" x 1.5"	3' x 10'	Gray
1.5"	1.5" x 1.5"	4' x 8'	Gray
1"	1.5" x 1.5"	4' x 12'	Gray
1"	1" x 4"	3' x 10'	Gray
2"	2" x 2"	4' x 12'	Gray

Stair Treads

1.5"	1.5" x 1.5"	22.5' x 12'	Stair treads are available in: VFR Vinyl Ester
1.5"	1.5" x 1.5"	27.6' x 12'	
1.5"	1.5" x 6"	22.75' x 12'	Fire Retardant (Dark Gray), or
1.5"	1.5" x 6"	up to 24"	
1.5"	1.5" x 6"	24.5" – 30"	IFR Isophthalic Polyester Fire Retardant (Green, Yellow or Light Gray)
1.5"	1.5" x 6"	30.5" – 36"	
1.5"	1.5" x 6"	36.6" – 42"	

Pultruded Grating



Pultruded grating is measured by shape and size of pultruded piece, percentage of open space, and spacing distance between cross rods.

Standard open space: 40%, 50%, & 60%.

Standard panel width: 3' and 4'

Standard panel length: 10', 12', 20' & 24'

I-Bar, IFR Isophthalic Polyester Fire Retardant

Panel thickness	Description	Color
1"	I-Bar, 6" pattern, cross rod spacing	Yellow
1"	I-Bar, 12" pattern, cross rod spacing	Yellow
1.5"	I-Bar, 6" pattern, cross rod spacing	Yellow
1.5"	I-Bar, 12" pattern, cross rod spacing	Yellow

I-Bar, VFR Vinyl Ester Fire Retardant

1"	I-Bar, 6" pattern, cross rod spacing	Yellow or Dark Gray
1"	I-Bar, 12" pattern, cross rod spacing	Yellow or Dark Gray
1.5"	I-Bar, 6" pattern, cross rod spacing	Yellow or Dark Gray
1.5"	I-Bar, 12" pattern, cross rod spacing	Yellow or Dark Gray

T-Bar, IFR Isophthalic Polyester Fire Retardant

2"	I-Bar, 6" pattern, cross rod spacing	Yellow
2"	I-Bar, 12" pattern, cross rod spacing	Yellow

T-Bar, VFR Vinyl Ester Fire Retardant

2"	I-Bar, 6" pattern, cross rod spacing	Yellow or Dark Gray
2"	I-Bar, 12" pattern, cross rod spacing	Yellow or Dark Gray

Stair Treads

Available in IFR and VFR, 6" pattern, cross rod spacing.

Pultruded Decking

Available in 24" wide, 10', 12', 20' and 24' lengths.